

Dedicated for harsh environments

APPLICATIONS

- Video broadcast & switching
- Legacy system upgrade
- RADAR/SONAR
- Electronic warfare
- Telecom
- Avionics

BENEFITS

- **Ready-to-use :**
 - 100% FMC or FMC+ compliant
- **Easy-to-use :**
 - No specific firmware required
- **Protocol agnostic**
- **Suitable for legacy issue**

KEY FEATURES


- VITA 57.1 or 57.4 compliant
- Up to 24 links
- Up to 12 Gbps per link
- Front connection : MTP
- On-demand rear connection : MTP, MT, VITA66
- Programmable oscillator
- Air cooled
 - Temperature range : -20°C to +70°C
- Conduction cooled
 - Temperature range : -40°C to +85°C



DEFENCE



INDUSTRY

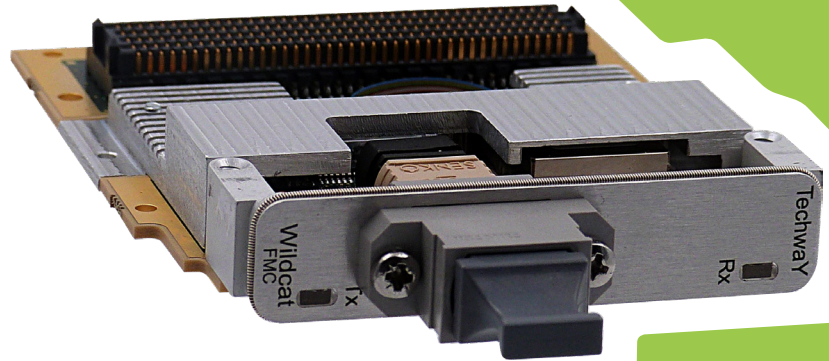

Optical communications have become the new standard in harsh, demanding environments.

TECHWAY brings you a state-of-the-art solution with the WildcatFMC series. These communication boards are dedicated to markets where customers have strong environmental requirements.

Based on the latest RADIALL D-Lightsys® components, the WildcatFMC solutions offer up to 24 channels @ up to 12 Gbps.

FMC compliant (VITA 57.1)

- **WildcatFMC-4_10** is a mezzanine card which offers 4 full duplex optical links at 10 Gbps each.

FMC+ compliant (VITA 57.4)

- **WildcatFMC-12_12** is a mezzanine card which offers 12 full duplex optical links at 12 Gbps each.
- **WildcatFMC-24-Tx_12** is a mezzanine card which offers 24 Tx (transmission) optical links at 12 Gbps each.
- **WildcatFMC-24-Rx_12** is a mezzanine card which offers 24 Rx (reception) optical links at 12 Gbps each.


All the WildcatFMC mezzanine cards can be easily integrated into existing system or into brand-new architecture.

The WildcatFMC solutions are compatible with both air and conduction cooled environment.

Information and photos subject to change without notice


WILDCATFMC FAMILY

- **FMC :**
 - 4 full duplex @ 10 Gbps
- **FMC+ :**
 - 12 full duplex @ 12 Gbps
 - 24 Tx @ 12 Gbps
 - 24 Rx @ 12 Gbps

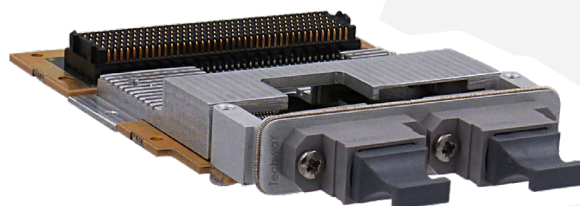

D-LIGHTSYS® FEATURES

- Proven technology
- Small footprint
- Low consumption
- Qualified for harsh environments
- Wide operating parameters
- Benefits of RADIALL's optical interconnect range

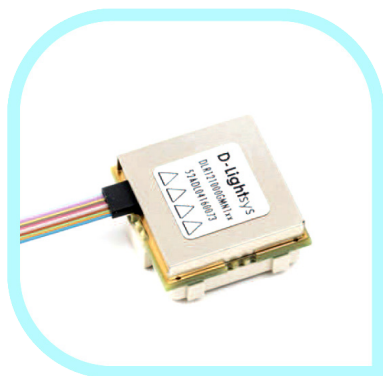

D-Lightsys® text and image
ACS 10GB handout - RADIALL

D-LIGHTSYS® TECHNOLOGY

Since 2007, D-Lightsys® transceivers have been flying with military and commercial aircrafts and have proven to be the perfect solution for demanding applications.

The new 10+ G range utilizes D-Lightsys® technology and offers the unique benefits, including a very small footprint and extended link budget for applications where long term data transmission reliability is required. The low power consumption makes these modules especially suited for on board applications (aircraft, UAV, satellites).

Directly compatible with most digital balanced signal protocols, the 10+ G range meets IEEE std 10G Base-SR10, Fiber Channel, InfiniBand, SFPDP, sRIO and VSR requirements as well as ARINC 818 and DVI video standards.

The D-Lightsys® solutions are qualified for shock and vibration and are in compliance with MIL standards.

The unique embedded controller provides wide operating parameters including independent channel control, equalization/pre-emphasis and link survey data. These 10+ G devices include an internal control loop to ensure a constant link budget within an extended temperature range of -40/+85°C.

ADD-ON PRODUCTS

In addition to the WildcatFMC products, we deliver add-on products such as cables and connectors.

OPTICAL CABLES - 8 or 12 links versions available.



- MTP to LC harness
- MT Ferule to LC harness
- MTP to MTP harness
- MTP to Elio connectors

Information and photos subject to change without notice